



FIG. 1

Polymer Characterization via Rectangular Torsion Temperature Sweep
[Frequency - 300 rad/s, Strain - 1%]


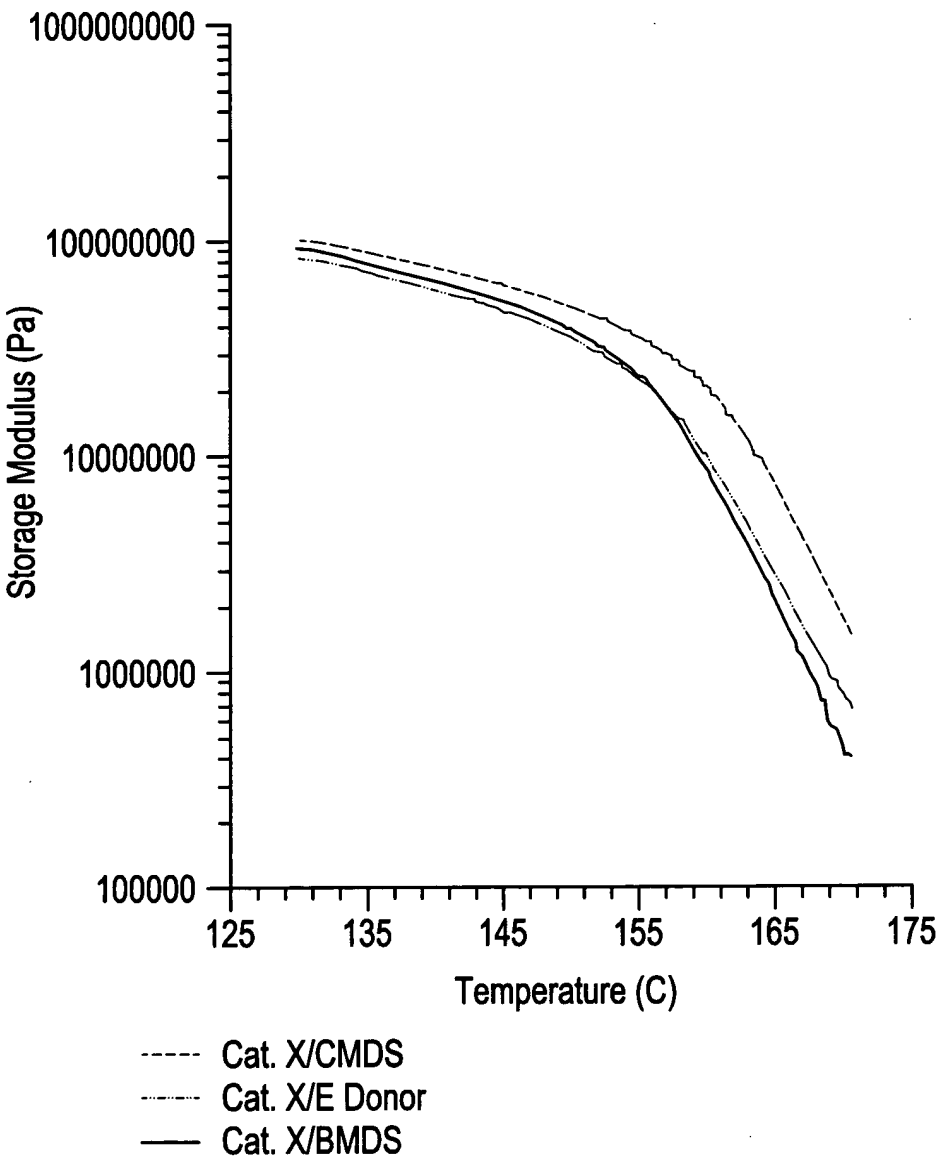


FIG. 2

Yield Stress vs. Temperature for Compression Molded Film
Grade Resins

[Bruckner, Stretch Velocity - 3m/min, Stretch Ratio - 4]

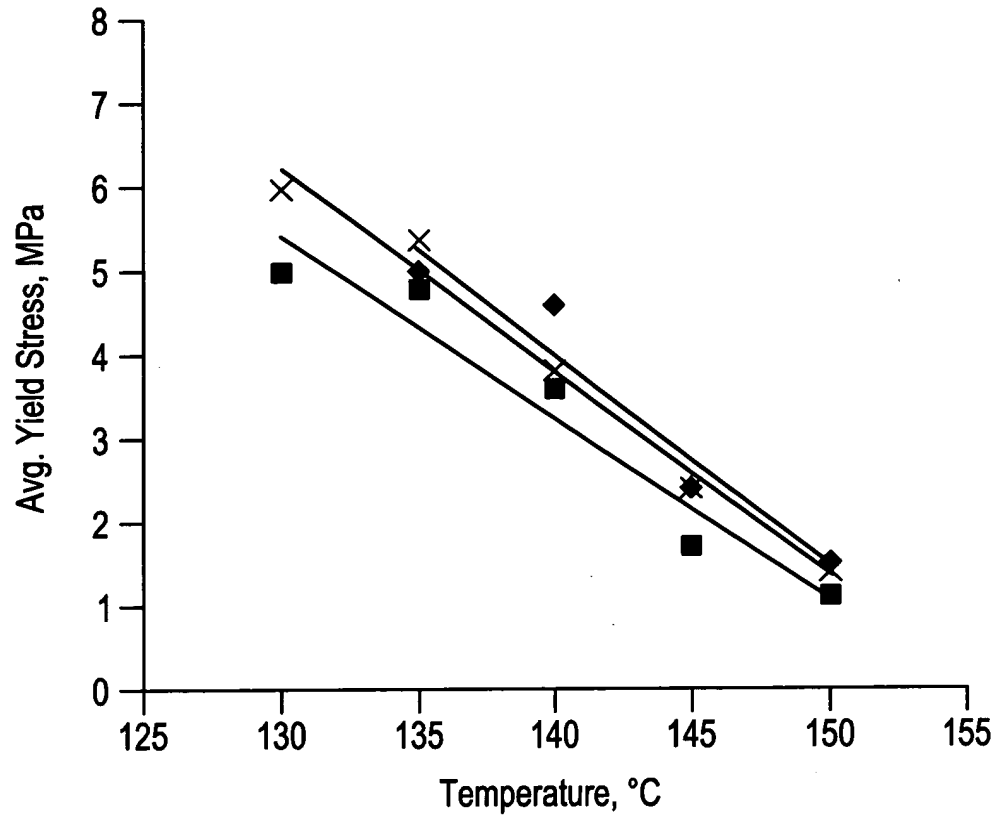

- ◆ Resin A
- × E Donor
- BMDS
- Linear (BMDS)
- Linear (Resin A)
- Linear (E Donor)